

WX17

Front Interface Module

WX17 with
MTX3 Chassis



Industrial 17" Front Interface Module

The WX17 is a replacement front interface module for legacy webLink17F and paneLink17 systems. The WX17 can be connected to various Chassis Modules to form a complete industrial computer solution.

Panel: 17.1" TFT LCD

Resolution: SXGA 1280 x 1024

Viewing Angle: (h|v): -70/+70 | -65/+70

Brightness: 300 nits

Bulb Life: CCFT @ 50,000 Hours

Lens: Anti-Glare 5-Wire Resistive Touchscreen
OR Anti-Glare Lexan

Contrast Ratio: 600:1

Specifications & Configurator

WX17

17.1" SXGA (1280x1024) TFT LCD



BEZEL

- P NEMA 4 Powder Coat
- S NEMA 4X Stainless Steel

LENS

- T Anti-Glare Resistive Touchscreen
- L Anti-Glare Lens

AVAILABLE CHASSIS MODULES

Use specific chassis configurator to complete P/N

Panel Mounting Depths

PIX Chassis - Compact
Panel PC modules available
with 0, 1 and 3 slot options.

PIX0




PIX1




PIX3




MTX3 Chassis -
Active backplane
system with 3 PCI
slots.




FGX7 Chassis -
Passive backplane
system with 1
PICMG/2 ISA/3
PCI slots and pull-
out hard drive




ATX7 Chassis -
Active backplane
system with 6 PCI
slots.





ITX3 Chassis -
Active backplane
thin system with 3
PCI slots.



FGE6 Chassis -
Passive backplane
system with 1
PICMG/2 ISA/3
PCI slots and pull-
out hard drives



FRONT DIMENSIONS

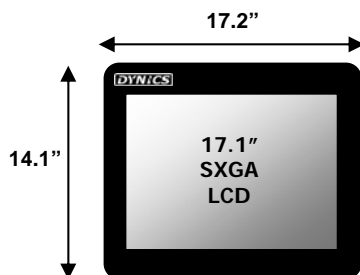

Dynics Inc
4330 Varsity Drive
Ann Arbor MI 48108
734.677.6100

*Mounting depth is increased 0.60" with rear mounted thin CD/DVD drive
Illustrations are not to scale

Industrial Computer Module ATX7



Active Backplane Industrial Computer

The ATX7 is an industrial computer module that can be connected to various front Interface modules or on its own to form a complete industrial computer solution.

- CPU:** Core 2 Duo or Pentium 4
- Memory:** Up to 2.0 GB
- Serial Ports:** Three RS-232, One RS-232/422/485
- USB Ports:** Four USB 2.0
- Networking:** One or Two 1.0 GB Ethernet Ports
- Video:** One RGB Port, On-Board Configurable
- Available Disk Drives:** 3.5" IDE Drives
- Keyboard/Mouse:** Two PS/2 Ports
- Expansion Slots:** 6 PCI Slots
- Power Supply:** 120-240 VAC
- Temperature Specs:** 0°-50°C (32°- 122°) operating
-25°-60°C (-4°-140°) non-operating
- Relative Humidity:** 10 ~ 95% non-condensing
- Shock:** 10G operating - 15G non-operating
- Vibration:** 1.0G from 57-2000 Hz operating
2.5G from 57-2000 Hz non-operating

Industrial Computer System

Specifications & Configurator



AVAILABLE FRONT INTERFACE MODULES

- FX17** 17.1" SXGA TFT LCD
- FX19** 19" SXGA TFT LCD
- FX20** 20" UXGA TFT LCD

- IC15** 15" XGA TFT LCD
- IC17** 17.1" SXGA TFT LCD

- WX17** 17.1" SXGA TFT LCD

DIMENSIONS Image not to scale

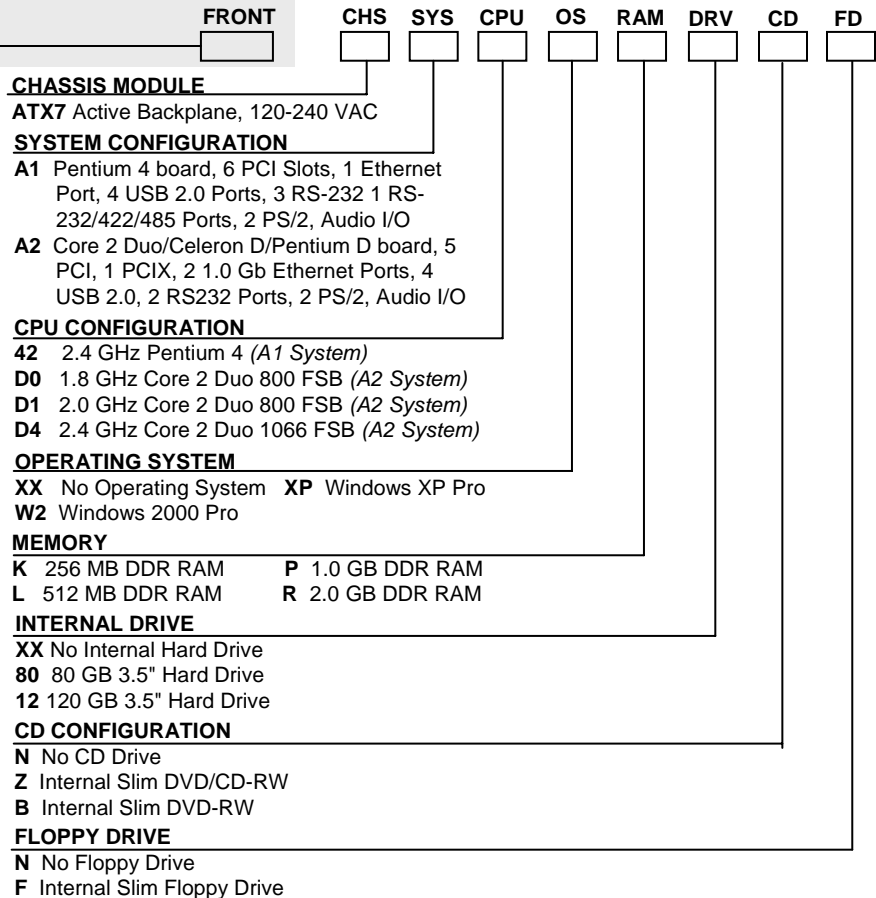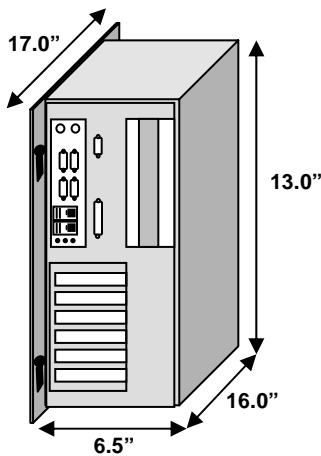

Dynics Inc
4330 Varsity Drive
Ann Arbor MI 48108
734.677.6100